

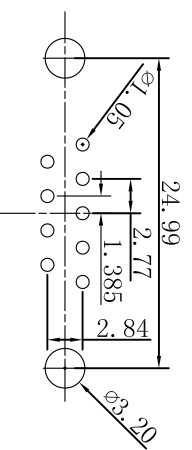
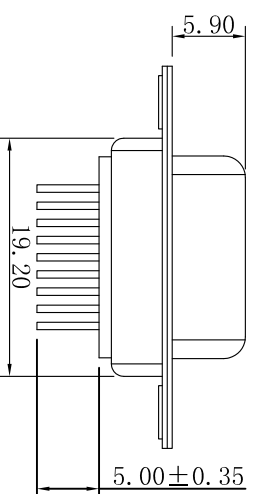


GP Component

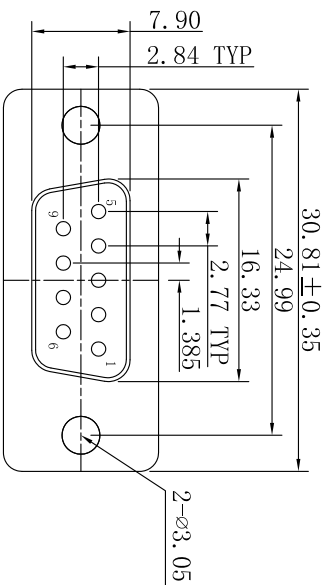


PCB layout

Specification Type

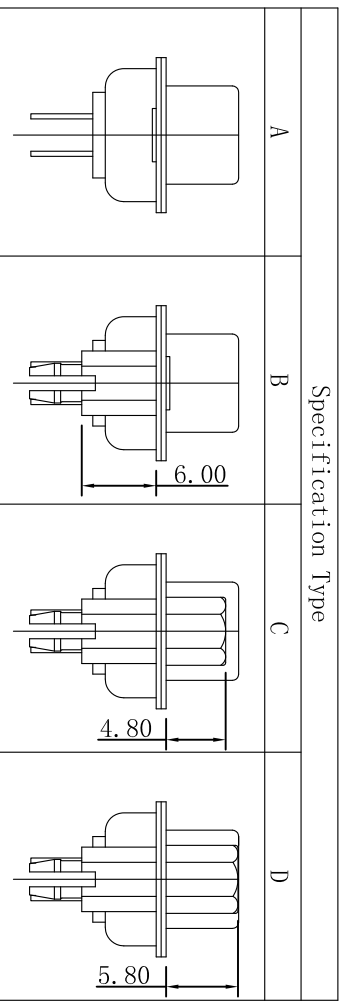

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2020.12.02	m t



CHARACTERISTICS/特性:

1. RATED VOLTAGE: 250V AC CD
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55℃~105℃
7. INSERTION/EXTRACTION FORCE PER CONTACT: 3.0Kg Max 0.3Kg Min.

01.DP0009 F X XXX XX A XXX

PIN Poles	09:9PIN	Water Code	
M/F Differentiates	M=Male F=Female	Specification Type	
Hsg Color	1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple	Hsg Material	
Plating		H1=PB1 HF H2=PA6T HF H3=PA9T HF H4=PA66 HF H5=LCF 10=PB1 11=PA6T 13=PA66 14=PA46	
G00:Gold flash	B00:Braight sn	M00:Matte sn	
G01:Gold 1U"	B01:Braight sn 1U"	M01:Matte sn 1U"	
G03:Gold 3U"	B03:Braight sn 3U"	M03:Matte sn 3U"	
Gxx:Gold XXU"	Bxx:Braight sn XXU"	Mxx:Matte sn XXU"	

<p>东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co.,Ltd</p>	UNITS: mm [inch]	DESIGN: 卓涛 2020.12.02	PART NAME: DP 9P系列图
	TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	CHECKED: 卓涛 2020.12.02	PART NO. 01.DP0009FXXXXXXXXXX
SCALE:1:1 SIZE:A4	APPROVED: 卓涛 2020.12.02	SHEET NO. 01 OF 01	