

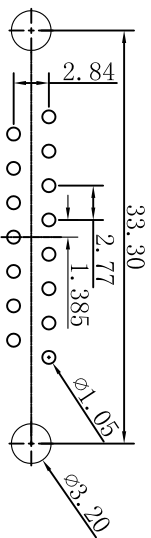
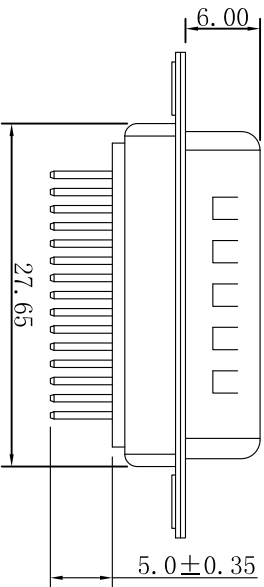
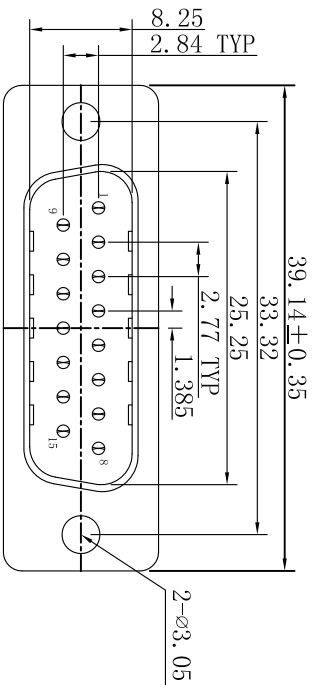


GP Component



PCB layout

Specification Type

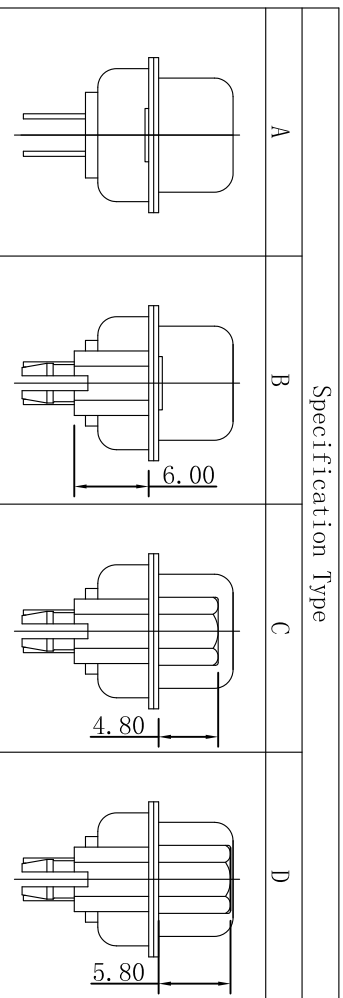

CHARACTERISTICS:

1. RATED VOLTAGE: 250V AC CD
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55°C~105°C
7. INSERTION/EXTRACTION FORCE PER CONTACT: 5.0Kg Max 0.45Kg Min.

01.DP0015 M X XXX XX A XXX

PIN Poles 15:15PIN	Water Code
M/F Differentiates M=Male F=Female	Specification Type
Hsg Color 1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple	Hsg Material H1=PB1 HF H2=PA6T HF H3=PA9T HF H4=PA66 HF H5=LCF 10=PP1 11=PA6T 12=PA9T 13=PA66 14=PA46
Plating G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"
B00:Braight sn B01:Braight sn 1U" B03:Braight sn 3U" Bxx:Braight sn XXU"	

UNTR: mm [inch]		DESIGN: 2020.12.12		PART NAME: DP 15M系列图	
		TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°		CHECKED: 2020.12.12	
APPROVED: 2020.12.12		SCALE: 1:1 SIZE:A4		SHEET NO. 01 OF 01	

东莞市跃展精密连接器有限公司
 Dongguan YueZhan Precision Connectors Co., Ltd

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			原始版本(INITIAL EDITION)	2020.12.12	m t