
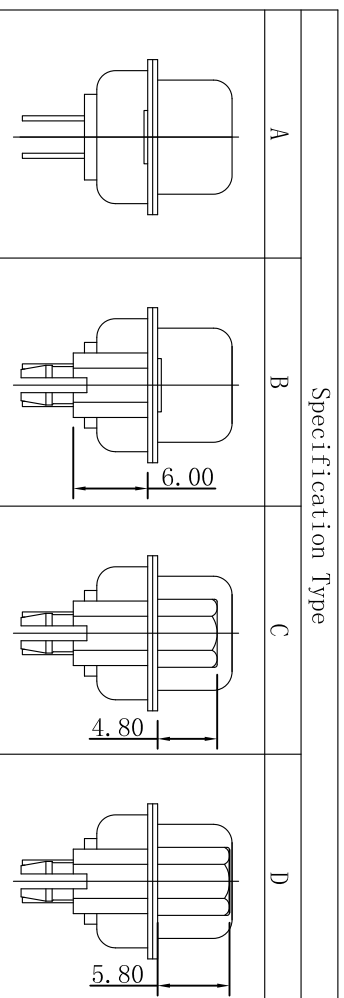
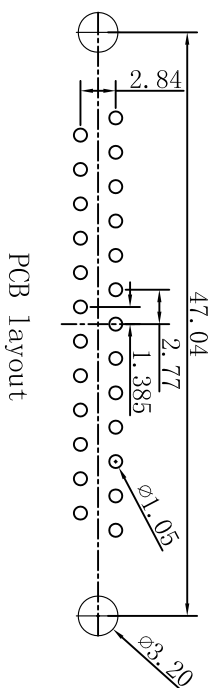
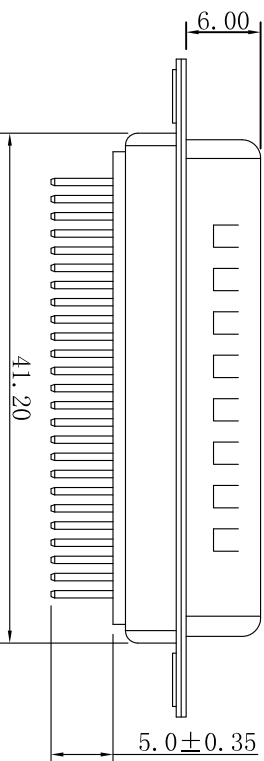



GP Component

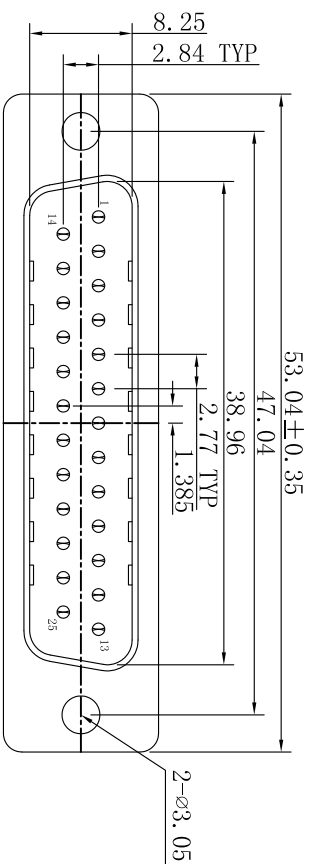

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2020.12.12	m t

CHARACTERISTICS:

- 1、 RATED VOLTAGE: 250V AC CD
- 2、 RATED CURRENT: 3.0AMP
- 3、 CONTACT RESISTANCE: 30mΩ Max.
- 4、 INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
- 5、 Electric Pressure: Keeping 60 second in AC 500V/1mA
- 6、 Operating temperature: -55℃~105℃
- 7、 INSERTION/EXTRACTION FORCE PER CONTACT: 8.5Kg Max
0.75Kg Min.

01.DP0025 M X XXX XX A XXX

PIN Poles	25:25PIN	M/F Differentiates	M=Male F=Female	Hsg Color	1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple	Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"	Water Code	Hsg Material

	DESIGN:	2020.12.12	<p>东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co.,Ltd</p>	PART NAME:	DP 25M系列图
	CHECKED:	2020.12.12		PART NO.	01.DP0025MXXXXXXXXXX
	APPROVED:	2020.12.12		DRAW NO.	
	SCALE:1:1	SIZE:A4		SHEET NO.	01 OF 01